

# visΩmax

*for the perfect finish*




## SANDINATOR cordless series

### Key Facts

**PZ860-A-30-NV-8** SANDINATOR CORDLESS SERIES, OSCILLATING (ESV03)

**PZ860-AE-50-NV-8** SANDINATOR CORDLESS SERIES, ORBITAL (ESX05)

**PZ860-AE-30-NV-8** SANDINATOR CORDLESS SERIES, ORBITAL (ESX03)



Powerful.



small.

Silent.



# Summary

continuously speed control

optimum temperature management

top & bottom start button

suitable for left & right handed users

perfect haptics due to Grip Tape

passively applicable charge level indicator

high quality materials

charging station with magnet connection

soft cover protection at speed controller and li-ion battery

patented motor/bearing technology

Li-Ion battery with 2-cell technology

long running time with minimal energy consumption

additively manufactured housing components with complex geometry for optimum functionality



# Specials

---



- 1 continuously speed control
- 2 Top and Bottom start button
- 3 Grip Tape for service and maintenance
- 4 2-cells Li-ion battery with gold plated plugs

# Features

---

Additively manufactured housing with cooling fins for optimum temperature management

Soft cover protection / impact protection




Quick-change system for an easy replacement of the backup-pad

Perfect haptics and a replaceable grip tape

# The Motor

---

Brushless external rotor motor for stable torque and high efficiency with small dimensions




Patented motor/bearing construction with one-sided preloaded double bearing and two-part shaft for high mechanical load, smooth running and accurate grinding.


Normally, the shaft is supported by a miniature bearing in the stator on external rotors. This is subject to increased wear and is therefore susceptible to mechanical loads.

This results in imprecise running and high noise development.

Due to the double bearing arrangement outside the stator, the usual bearing arrangement in the stator due to maintenance-prone miniature bearings is no longer necessary.

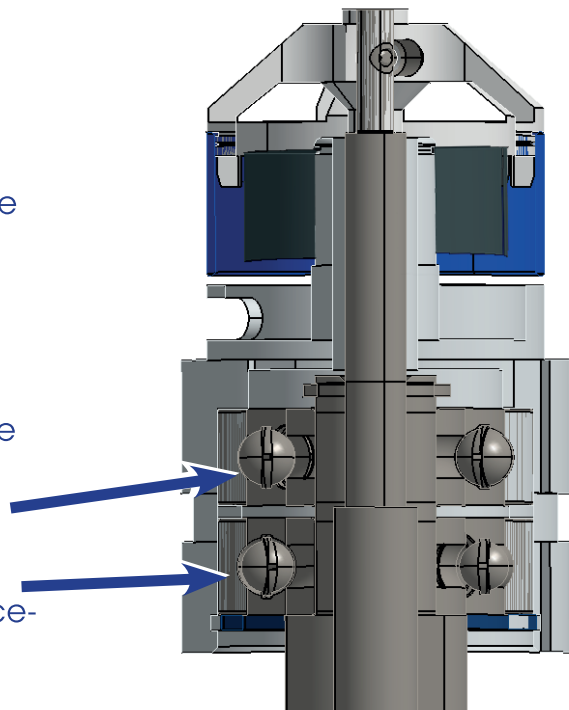


# The Li-Ion battery

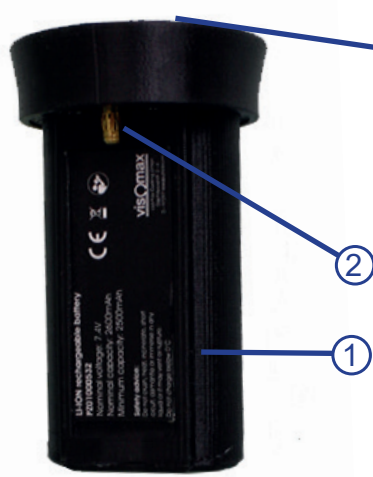

- 1 Li-Ion battery
- 2 gold plated plugs
- 3 charge indicator

The Li-Ion battery has integrated protection electronics, which continuously monitors temperature and voltage and when exceeded the Li-Ion battery switches off automatically. This prevents the battery from being overloaded, overheated and deep discharge.

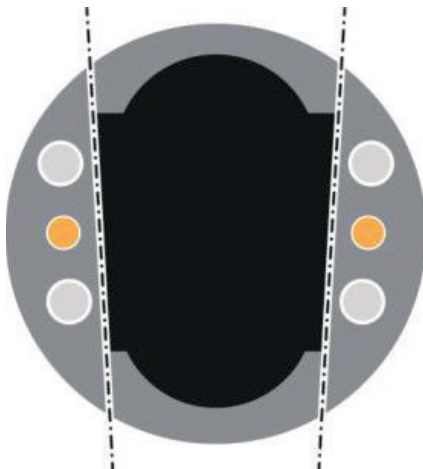


## the reverse polarity protection

The asymmetrical cross-section of the battery, the charging station and the sandinator ensures that the battery can only be used in the correct position.



# The Li-Ion battery

---

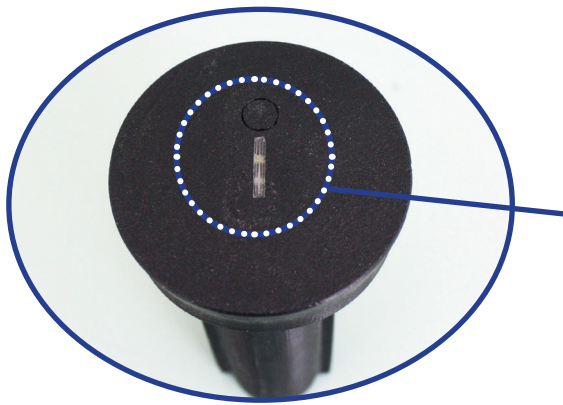

The charge level indicator is located on the bottom of the battery.

The four LED's are activated by pressing the button, the state of charge of the Li-Ion battery can also be checked without it being plugged into the machine or the charging station.

## Charge level indicator:



**100 % charged**



**> 75 % charged**



**> 50 % charged**



**> 25 % charged**



# Charging station




The charging station has an aluminium cooling tube, which ensures that the optimum temperature window of the battery is maintained during the charging process. Due to the optimised temperature management, charging is accelerated and the Life time is extended.

The bottom of the charging station is equipped with a magnet connection so that the charging station can be attached to suitable metal surfaces in a horizontal or vertical position.


# Insert / removing the battery

---

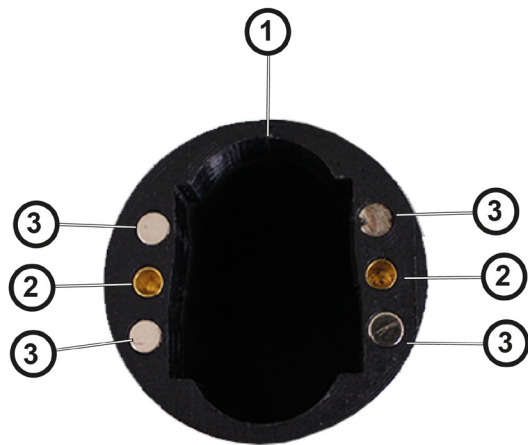


- 1 battery sander
- 2 Gold contacts (socket)
- 3 magnetic lock system

## INSERT THE BATTERY

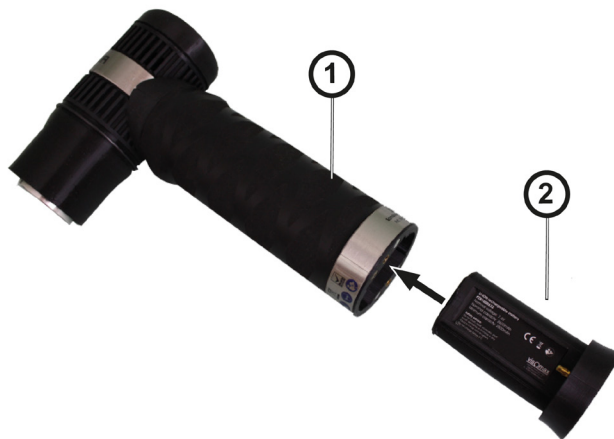

Insert the battery **(2)** into the battery sander **(1)**

## REMOVING THE BATTERY

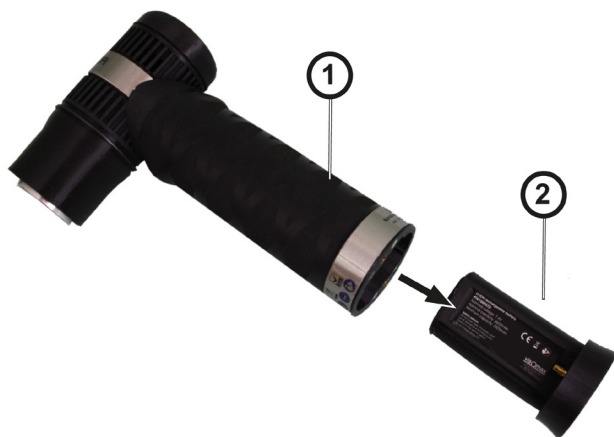

Remove the battery **(2)** from the battery sander **(1)**

The battery is held securely in the machine by a magnet lock system.  
Without clamps or complicated locking mechanisms.

# Technical data

<b>Battery sander</b> Length [mm] Weight [g] Total weight [g] <small>incl. Backup-Pad and battery</small> Angle Offset [mm] Drive Speed [rpm]	<b>oscillating</b> <b>PZ860-A-30-NV-8</b> 170 400 535 90° 3 continously, oscillating 5000 bis 8500	<b>orbital</b> <b>PZ860-AE-50-NV-8</b> 170 430 565 90° 5 continously, orbital 5000 bis 8500	<b>orbital</b> <b>PZ860-AE-30-NV-8</b> 170 400 535 90° 3 continously, orbital 5000 bis 8500
<b>Environmental conditions</b> Temperatur [C°] Humidity (relative)	-5 - +40 max. 80 %	-5 - +40 max. 80 %	-5 - +40 max. 80 %
<b>Noise and vibration information</b> The A-weighted noise level of the battery sander is typically:  Sound pressure level [dB(A)] LpA Uncertainty K [dB] Ah [m/sec²] Uncertainty K [m/sec²]	  55 4 1,4 1,5	  55 4 3,2 1,5	  55 4 1,4 1,5
<b>Battery</b> Battery type Voltage [V/DC] Capacity [Ah/Wh] Weight [g]  <b>Charger</b> Input voltage [V AC] Frequency [Hz] Charging time [min] Charging temperature [°C] Weight [g] Protection class  <b>Charging station</b> Weight [g]	Lithium-Ion (Li-Ion) 7,5 2,6 / 19,24 130  100 - 240 50 / 60 90 -20 ... +30 100 II  135		

# Scope of delivery

PZ860-A-30-NV-8

Quantity	Description
1	Battery sander PZ860-A-30-NV-8
1	Charging station
1	Power supply
2	Battery
1	Backup pad medium velcro 30 mm
1	Backup-Pad medium stick-on 30 mm

## BATTERY SANDER OSCILLATING PZ860-A-30-NV-8



## CHARGING STATION



## POWER SUPPLY



# Scope of delivery

PZ860-A-30-NV-8


## BATTERY



## BACKUP PAD



A



B

### Backup pads medium

- A with velcro
- B with film support

# Scope of delivery

PZ860-AE-50-NV-8

Quantity	Description
1	Battery sander PZ860-AE-50-NV-8
1	Charging station
1	Power supply
2	Battery
1	Backup pad medium velcro 30 mm
1	Backup pad medium stick-on 30 mm

## BATTERY SANDER ORBITAL PZ860-AE-50-NV-8



## CHARGING STATION



## POWER SUPPLY



# Scope of delivery

PZ860-AE-50-NV-8

## BATTERY



## BACKUP PAD



A



B

### Backup pads medium

- A with velcro
- B with film support



# Scope of delivery

PZ860-AE-30-NV-8

Quantity	Description
1	Battery sander PZ860-AE-30-NV-8
1	Charging station
1	Power supply
2	Battery
1	Backup pad medium velcro 30 mm
1	Backup pad medium stick-on 30 mm

## BATTERY SANDER ORBITAL PZ860-AE-30-NV-8



## CHARGING STATION



## POWER SUPPLY



# Scope of delivery

PZ860-AE-30-NV-8

## BATTERY



## BACKUP PAD



A



B

### Backup pads medium

- A with velcro
- B with film support



## CONTACT FOR ORDERS

Visomax Coating GmbH  
Dachdeckerstr. 2 - 4  
97297 Waldbuettelbrunn  
Germany

Phone : +49 931 452814 0  
Fax : +49 931 452814-29  
[bestellung@visomax.de](mailto:bestellung@visomax.de)

[www.visomax.de](http://www.visomax.de)